


# Lighting Specification Sheet

Classic Tree Light (CCTL1C)

Old world craftsmanship. . .tomorrow's technology®

Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Specifier: \_\_\_\_\_

- Must operate lamp between 10.5 -12.0 volts. Optimal range is 10.8 to 11.3. Check voltage with digital multi-meter.
- Recommended mounting height 25' off grade.
- Surface mount using hardware appropriate for the application. Allow for air flow between canopy & tree (see detail below).
- Attach Fixture Record Tag to Spider Splice Cap.

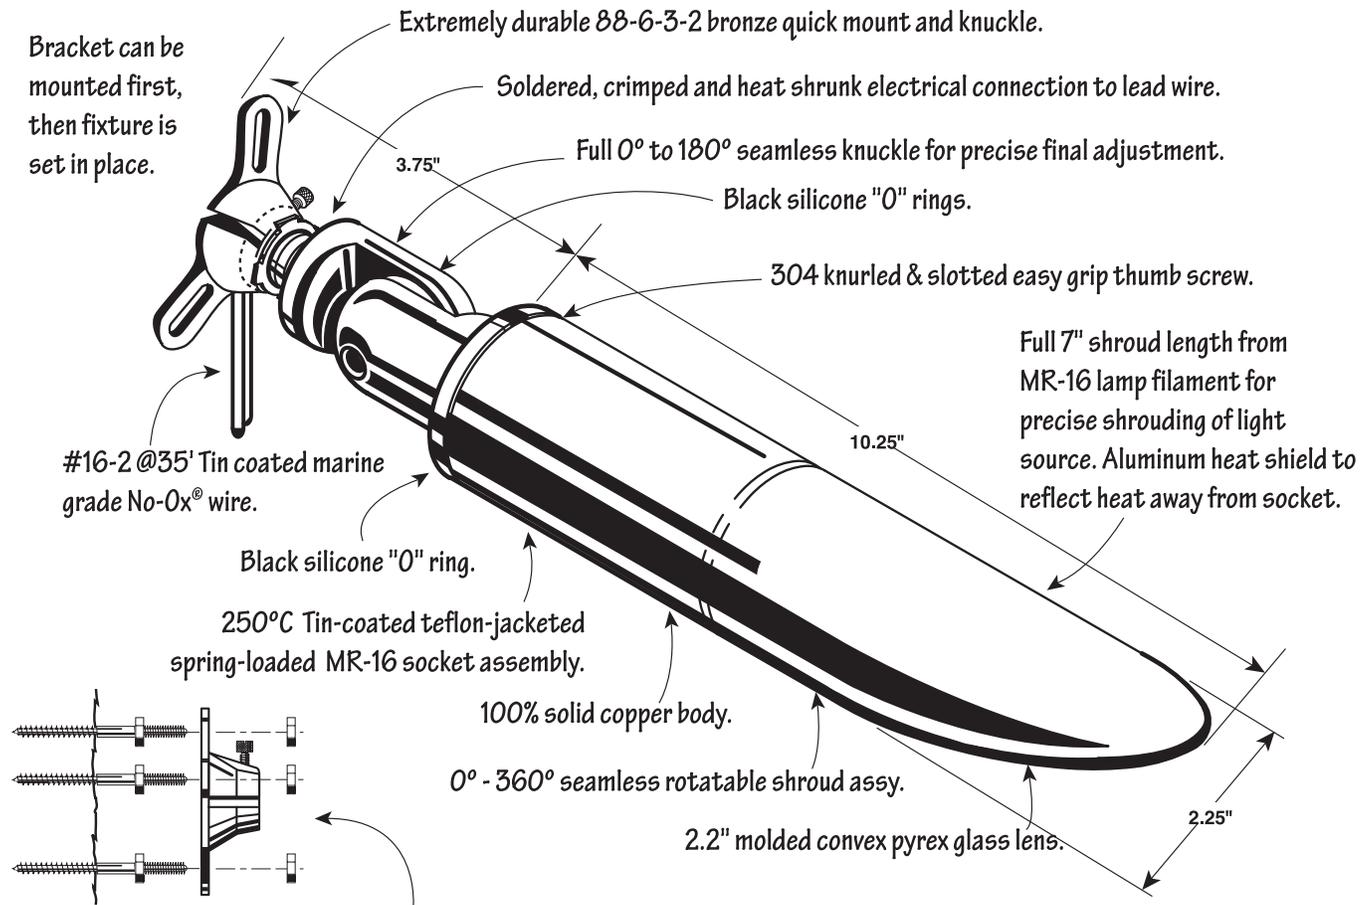

Mounting detail using CAST Tree Mount SS Hanger Bolts. (CTREEH1(24))  
 Note that bolts allow for breathing space between bracket and tree to prevent tree rot

Drawing not to scale

Plan Symbol:

## Notes

- Requires MR-16 (not included)
- Max. lamp rating 50 watts
- Use only covered MR-16 lamps
- For downward and upward orientation
- Refer to product installation sheet prior to installation

## MOUNTING OPTIONS

- Mounting Canopy - Unthreaded (CFM1CBS) (not for use in trees)