



Project: \_\_\_\_\_ Date: \_\_\_\_\_  
 Fixture Type: \_\_\_\_\_ Quantity: \_\_\_\_\_  
 Specifier: \_\_\_\_\_

Drawing not to scale

**Must operate lamp between 10.5 -12.0 volts. Optimal range is 10.8 to 11.3. Check voltage with digital multi-meter.**

**Extremely durable solid sand cast 88-6-3-2 bronze ring and 5.25" molded convex pyrex glass lens.**

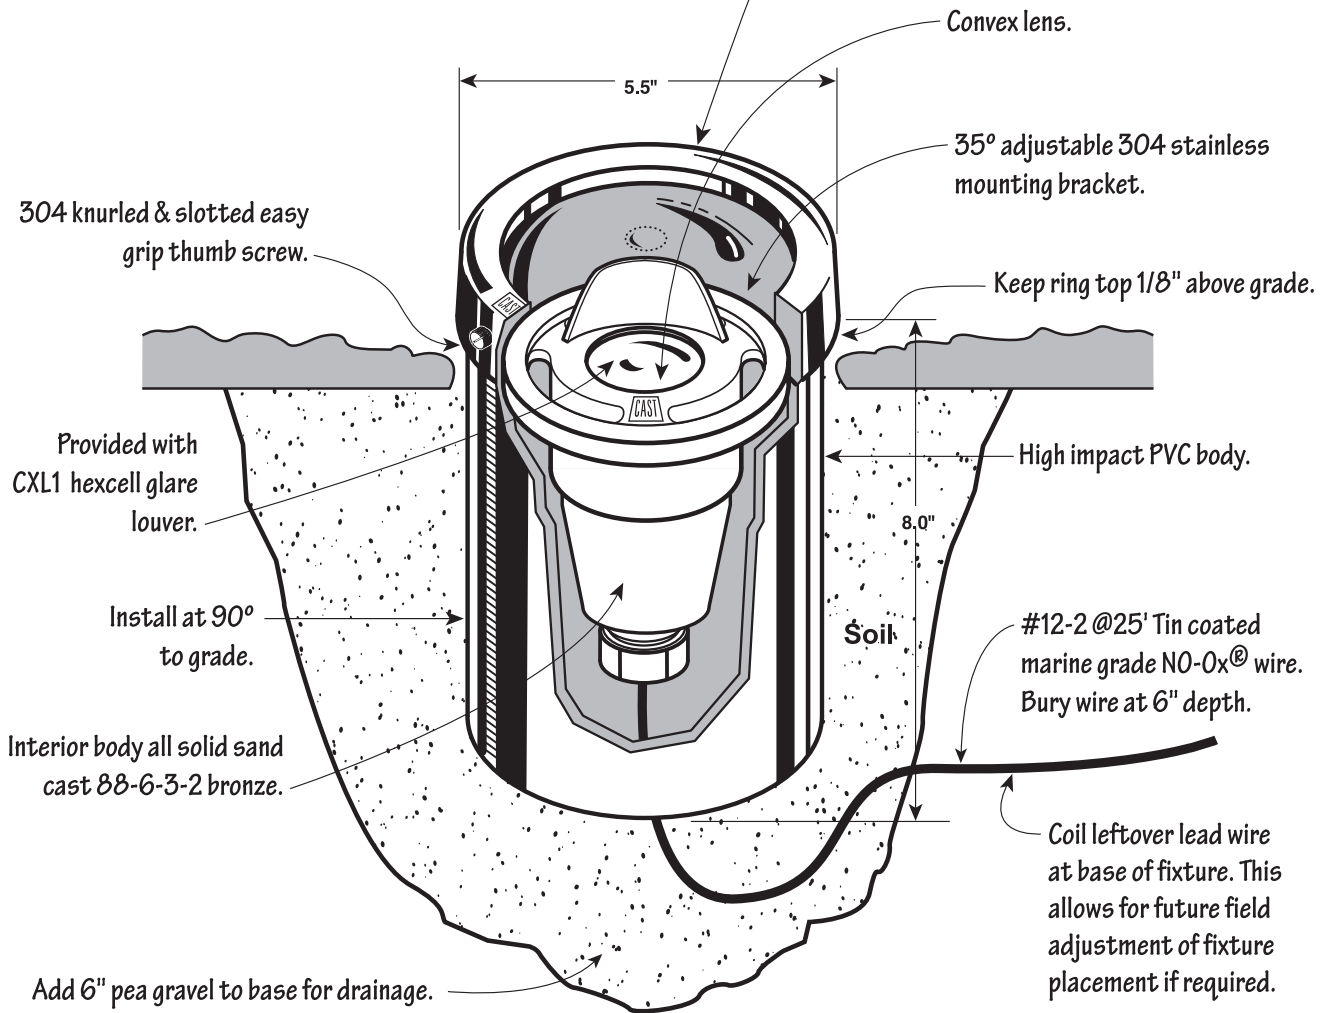

Plan Symbol: 

**Notes**

- Requires MR-16 (not incl.) (max. rating 50W)
- Use only covered MR-16 lamps
- Do not install in low-lying areas where water can collect in

- fixture
- Refer to product installation sheet prior to installation

**OPTIONS**

- ✗ Lens and Bronze Ring (CWLR1CB)(incl.)
- Bronze Grate (CWLG1CB)
- Lens for Bronze Grate (CWLGLENS)
- Optical Spread Lens (COSL)
- Optical Linear Spread Lens (COLL)
- Optical Frosted Lens (COFL)
- ✗ Hexcell Louver (CXL1)(incl.)