


Planning Instructions

750ft. Fence, 20ft. Spacing

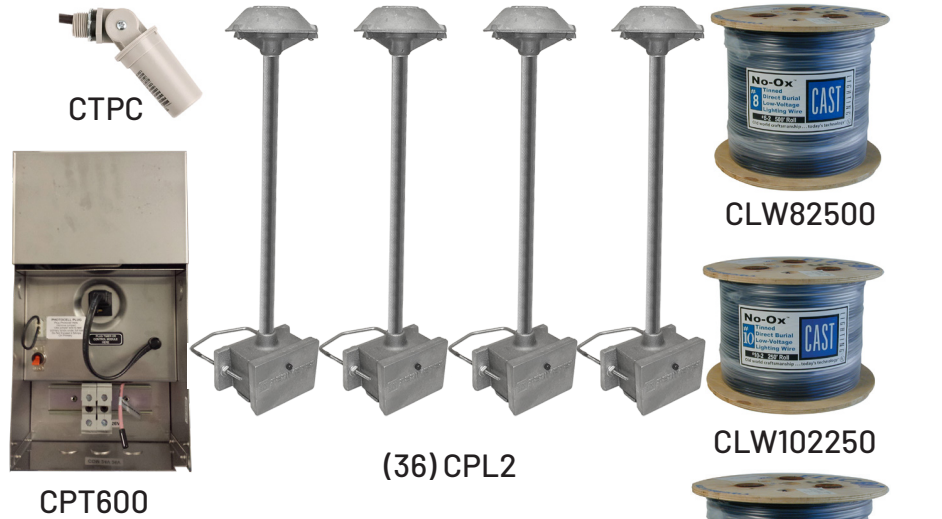


(36) CPL2

CLW82500

CLW102250

CLW102500

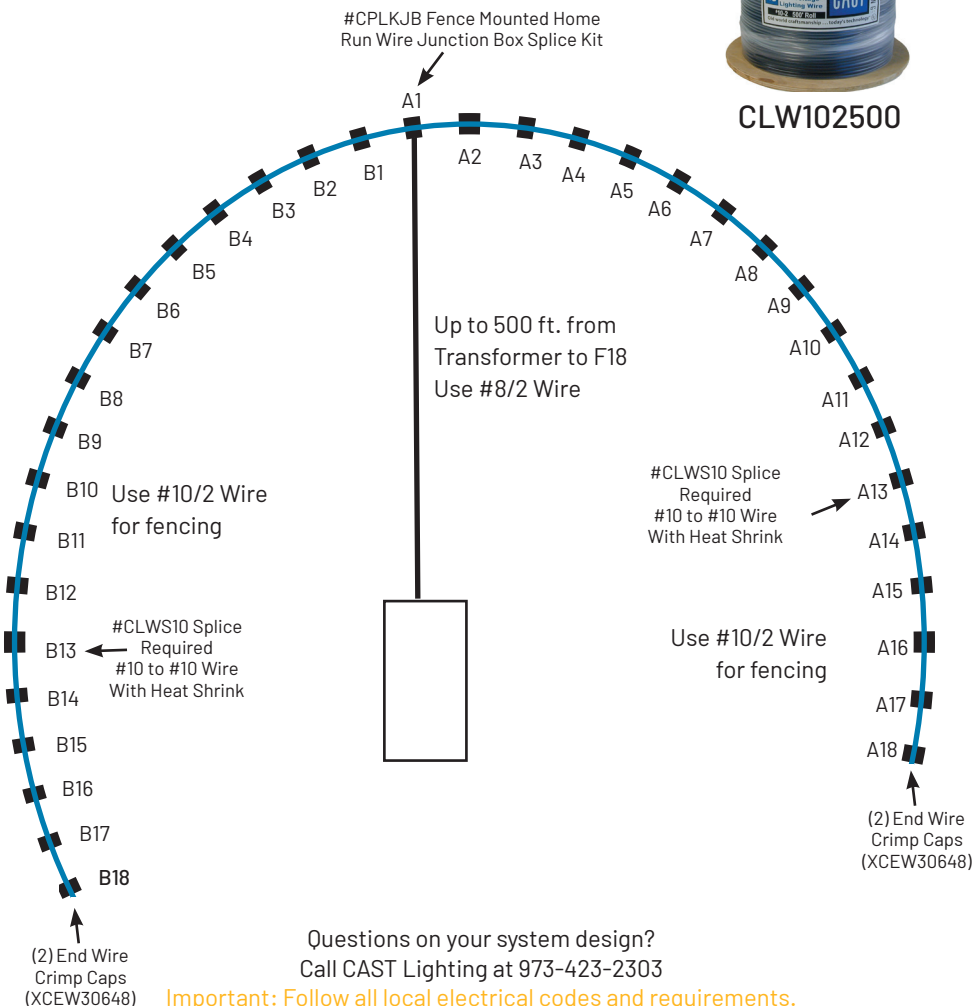

Questions on your system design?
Call CAST Lighting at 973-423-2303

Important: Follow all local electrical codes and requirements.

Kit Contents

Please check that you received all of these components.

- (36) CAST LED Perimeter Lights (CPL2)
- (1) 600VA CAST Perimeter Lighting Transformer (CPT600)
- (1) CAST Photocell (CTPC)
- (1) 250 Ft. Roll CAST #10/2 No-Ox Wire (CLW102250)
- (1) 500 Ft. Roll CAST #10/2 No-Ox Wire (CLW102500)
- (1) 500 Ft/ Roll CAST #8/2 No-Ox Wire (CLW82500)
- (72) Quick-connect Posi-Tap splice connection (CPQC1) (2 per fixture)
- (3) Butt Crimp Wire Splice with Heat Shrink #10/2 to #10/2 (CLWS10)
- (6) Bag 100 pc. 11" UV Resistant Cable Tie
- (4) #10/2 End Wire Crimp Cap (XEW30648)
- (1) Fence Mounted Home Run Wire Junction Box Splice Kit (CPLKJB)

NOTES:

1. Attach wire directly to inside of horizontal fence pipe at 7 o' clock orientation. Use cable ties every 18 inches.
2. Attach wire to common and 26 Volt Tap.
3. Make sure all terminal block connections are tight.

NOTE: Fixture mounts to Round upright fence post 4.5 inch O.D. or smaller. Contact factory for other post mounting options.

