



UL Verification Services Inc.
7036 Snowdrift Road
Allentown, PA 18106
610-774-1300



Photometric Test Report

Relevant Standards
IES LM-79-2008, ANSI C82.77-10-2014, CIE 13.3-1995
CIE 15-2004, ANSI C78.377-2017, IES TM-30-2018

Prepared For
Cast Lighting
David Beausoleil
1120A Goffle Rd
Hawthorne, NJ 07506
United States

Catalog Number
CPL38
Order Number
13587672
Test Number
13587672.01

Test Date

2020-12-08

Prepared By

Javier Caban, Technician

Approved By

Kevin Rodriguez, Project Handler

The results contained in this report pertain only to the tested sample.
This report shall not be reproduced, except in full, without written approval of Underwriters Laboratories.
This report must not be used by the client to claim product certification, approval, or endorsement by
NVLAP, NIST, or any agency of the Federal Government.



Table of Contents

Summary of Results	Page 3
Integrating Sphere Results	Page 4
Distribution Results	
Test Conditions / Summary of Results / ISOPlot	Page 5
Maximum Plane and Cone Plot / Zonal Lumen Summary	Page 6
IES BUG Rating	Page 7
Full TM-30 Report	Page 8

Laboratory results may not be representative of field performance
Ballast factors have not been applied

Testing was performed in a 3-meter integrating sphere using the 4π geometry method.

Absorption correction was employed for Sphere measurement

Tested in 30 planes left side, 30 planes right side, left and right averaged
Vertical test increments are 2.5 degrees
Test distance exceeds five times the greatest luminous opening of luminaire
Test Number 13587672.01 - Page 2 of 8



Luminaire Description: Cast aluminum housing, white reflective inner coating, no enclosure
Lamp: Four white LEDs with optics below each
Mounting: Pathway
Ballast/Driver: Two Cast Perimeter XCPD1 drivers

Luminaire



Luminaire Characteristics

Luminous Length: 8.50 in.
Luminous Width: 5.000 in.

Summary of Results

Integrating Sphere

Luminous Flux: 1172 Lumens
Efficacy: 109.38 lm/w
CCT: 4506 K
CRI (Ra): 80.5

Distribution

Roadway Classification: Type IV, Medium
Cutoff Classification: Noncutoff
BUG Rating: B1 U1 G1

Electrical Data at 17 VDC

Test Temperature: 24.5 °C
Voltage: 17.03 VDC
Current: 0.6291 A
Power: 10.72 W





Color Quality - Integrating Sphere

Integrating Sphere Test Conditions

Temperature	Voltage	Current	Power	Power Factor	Frequency	Current THD
24.5 °C	17.03 VDC	0.6291 A	10.72 W	N/A	N/A	N/A


Summary of Results

Total Output:	1172 Lumens	Chromaticity (x):	0.3607
Efficacy:	109.4 lm/w	Chromaticity (y):	0.3649
CCT:	4506 K	Chromaticity (u'):	0.2168
CRI (Ra):	80.5	Chromaticity (v'):	0.4933
CRI (R9):	11.8	TM-30 Rf:	80
Peak Wavelength:	446 nm	TM-30 Rg:	99
Dominant Wavelength:	576 nm	TM-30 Rcs,h1:	-11%
S/P Ratio:	1.75	Duv:	0.0007

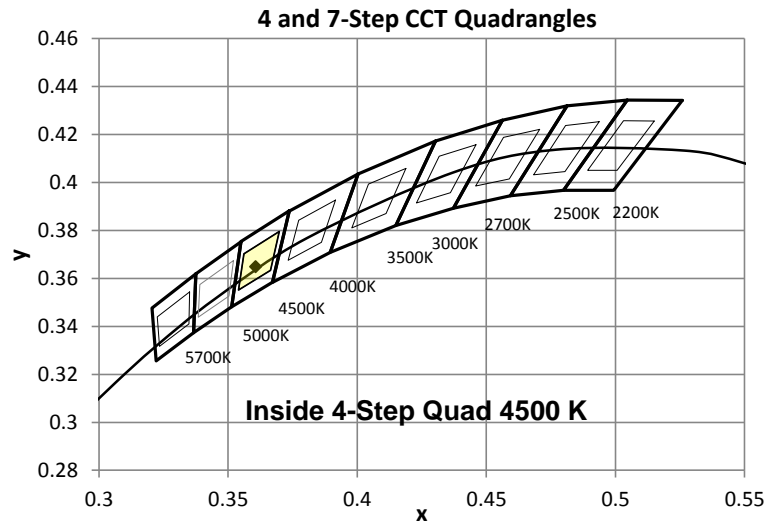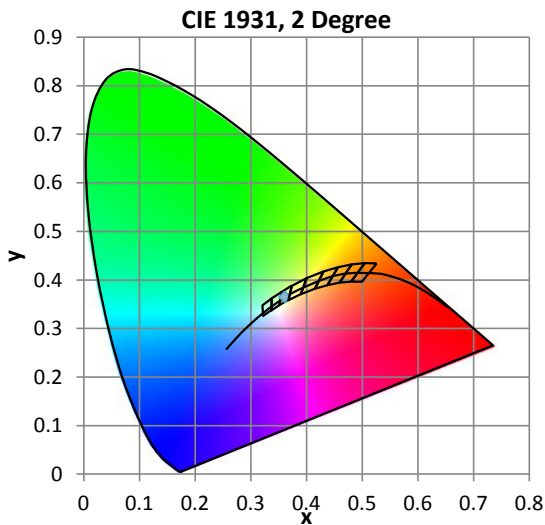

Color Rendering Index Detail

Ra (CRI)	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
80.5	79.8	83.6	86.2	81.9	79.7	77.7	85.8	69.1	11.8	60.8	81.0	58.7	79.9	92.0	74.5

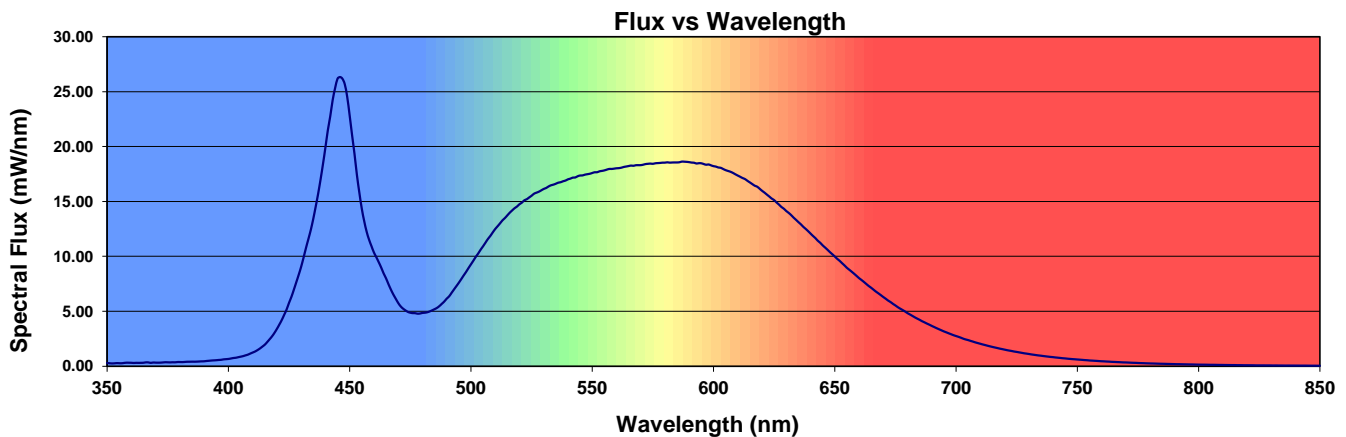



Distribution - Goniophotometer


Distribution Test Conditions

Temperature	Voltage	Current	Power	Power Factor	Frequency	Current THD
24.7 °C	17.00 VDC	0.6340 A	10.78 W	N/A	N/A	N/A

Summary of Results


IES Roadway Classification:	Type IV, Medium	Total Lumen Output:	1166 Lumens
Cutoff Classification	Noncutoff	Luminaire Efficacy:	108.2 lm/w
BUG Rating:	B1 U1 G1	Maximum Candela:	516 Candela

ISO FootCandle Plot at 20 Feet

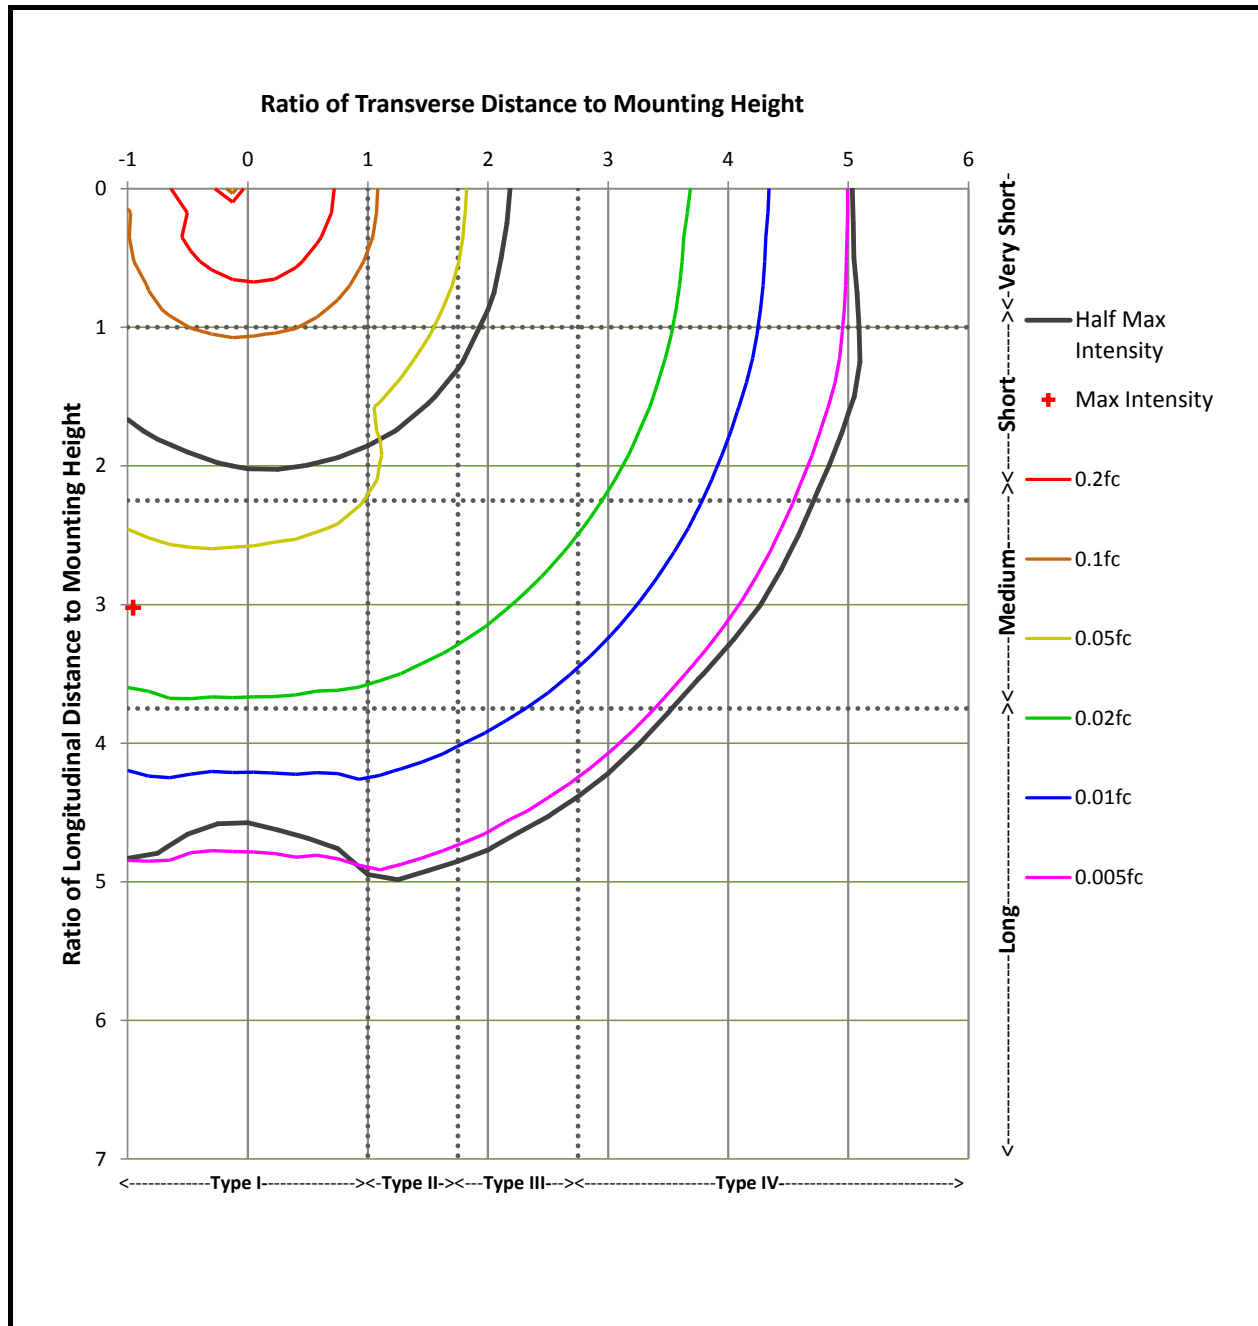



Maximum Plane and Cone Plots of Candela

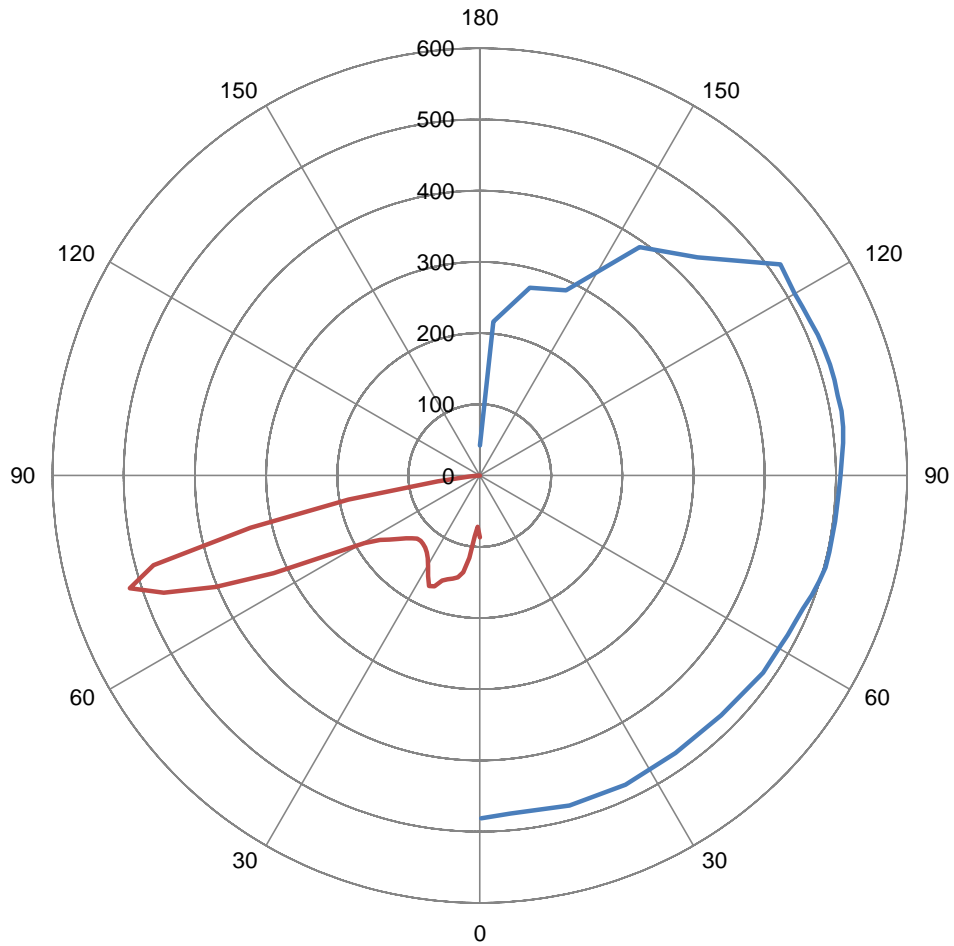

Vertical Plane Through

107.5 ° Lateral

Lateral Cone Through

72.5 ° Vertical

Maximum Intensity (Candlepower):


516 Candela

Zonal Lumen Summary

Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire	Zone	Lumens	% of Luminaire
0-5	2.3	0.2%	60-65	104.4	9.0%	120-125	0.0	0.0%
5-10	8.0	0.7%	65-70	172.5	14.8%	125-130	0.0	0.0%
10-15	16.5	1.4%	70-75	222.4	19.1%	130-135	0.0	0.0%
15-20	25.1	2.2%	75-80	162.7	14.0%	135-140	0.0	0.0%
20-25	34.2	2.9%	80-85	51.1	4.4%	140-145	0.0	0.0%
25-30	41.3	3.5%	85-90	6.9	0.6%	145-150	0.0	0.0%
30-35	41.7	3.6%	90-95	1.1	0.1%	150-155	0.0	0.0%
35-40	43.2	3.7%	95-100	0.4	0.0%	155-160	0.0	0.0%
40-45	46.2	4.0%	100-105	0.2	0.0%	160-165	0.0	0.0%
45-50	51.5	4.4%	105-110	0.1	0.0%	165-170	0.0	0.0%
50-55	60.7	5.2%	110-115	0.1	0.0%	170-175	0.0	0.0%
55-60	73.3	6.3%	115-120	0.0	0.0%	175-180	0.0	0.0%



IES "BUG" Rating
 (Back Light, Uplight, Glare)
 Per IES TM-15-11

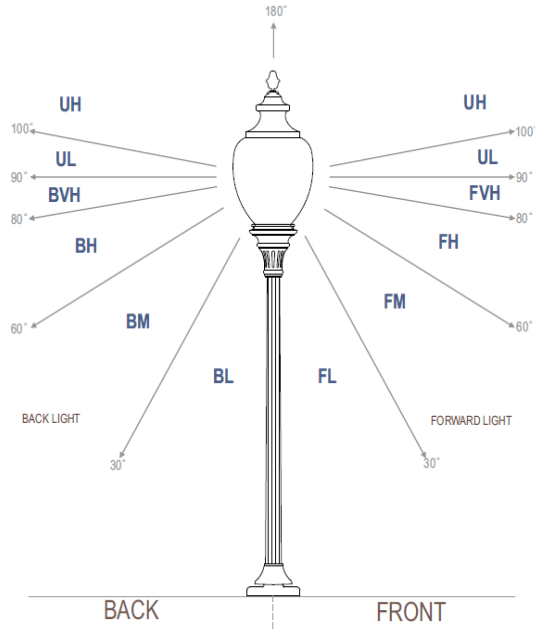

Luminaire Classification System (LCS)

LCS	Zone	Lumens	Luminaire %
FL	(0-30)	73.2	6.3%
FM	(30-60)	161.9	13.9%
FH	(60-80)	347.0	29.8%
FVH	(80-90)	28.7	2.5%
BL	(0-30)	54.3	4.7%
BM	(30-60)	154.7	13.3%
BH	(60-80)	314.9	27.0%
BVH	(80-90)	29.2	2.5%
UL	(90-100)	1.5	0.1%
UH	(100-180)	0.5	0.0%
Total		1165.9	100.0%
BUG Rating	B1 U1 G1		







ANSI/IES TM-30-18 Color Rendition Report

Source: Test Number: 13587672.01

Manufacturer: Cast Lighting

Date: 2020-12-08

Model: CPL38

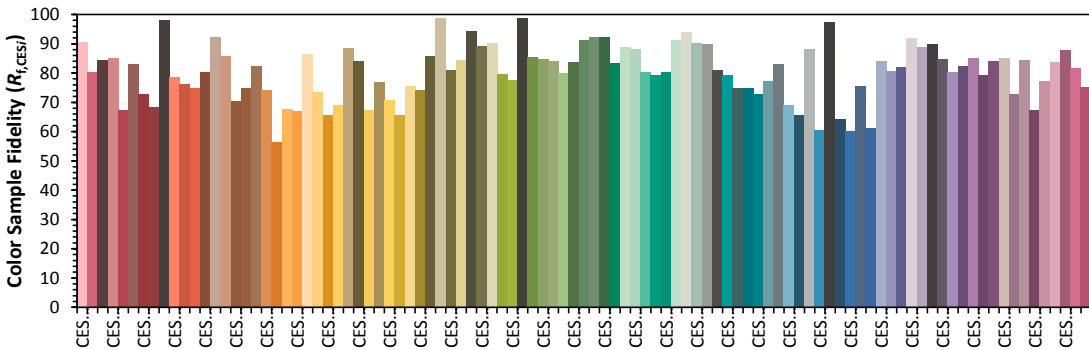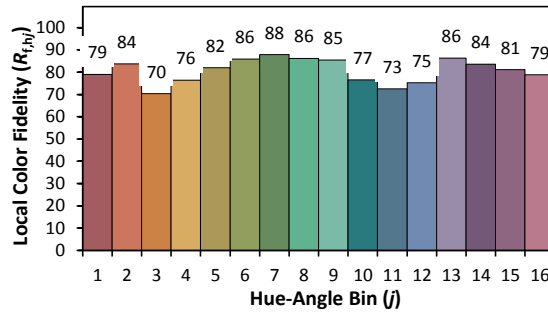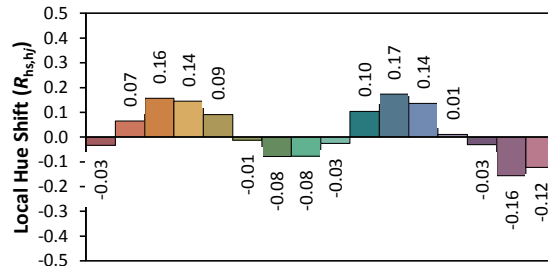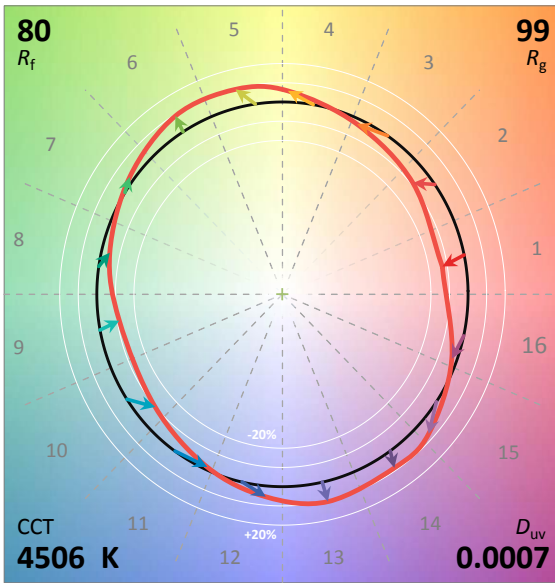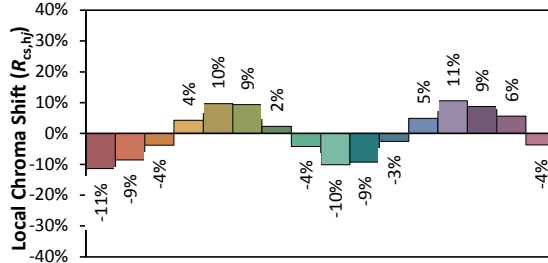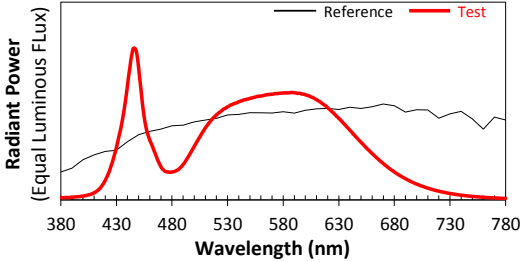

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3607
y 0.3649
u' 0.2168
v' 0.4933

CIE 13.3-1995 (CRI)	
R_a	80
R_g	12

Colors are for visual orientation purposes only. Created with the IES TM-30-18 Calculator Version 2.00.