


#	Date	Comments

Revisions	

Drawn By: Joe Frey  
 Checked By:  
 Date: 11/29/2021  
 Scale: None

**Test Description:**  
 Perimeter Model CPL2  
 Tested at 17V DC 20' Foot Spacing,  
 Lumiere 15' Feet Off Grade

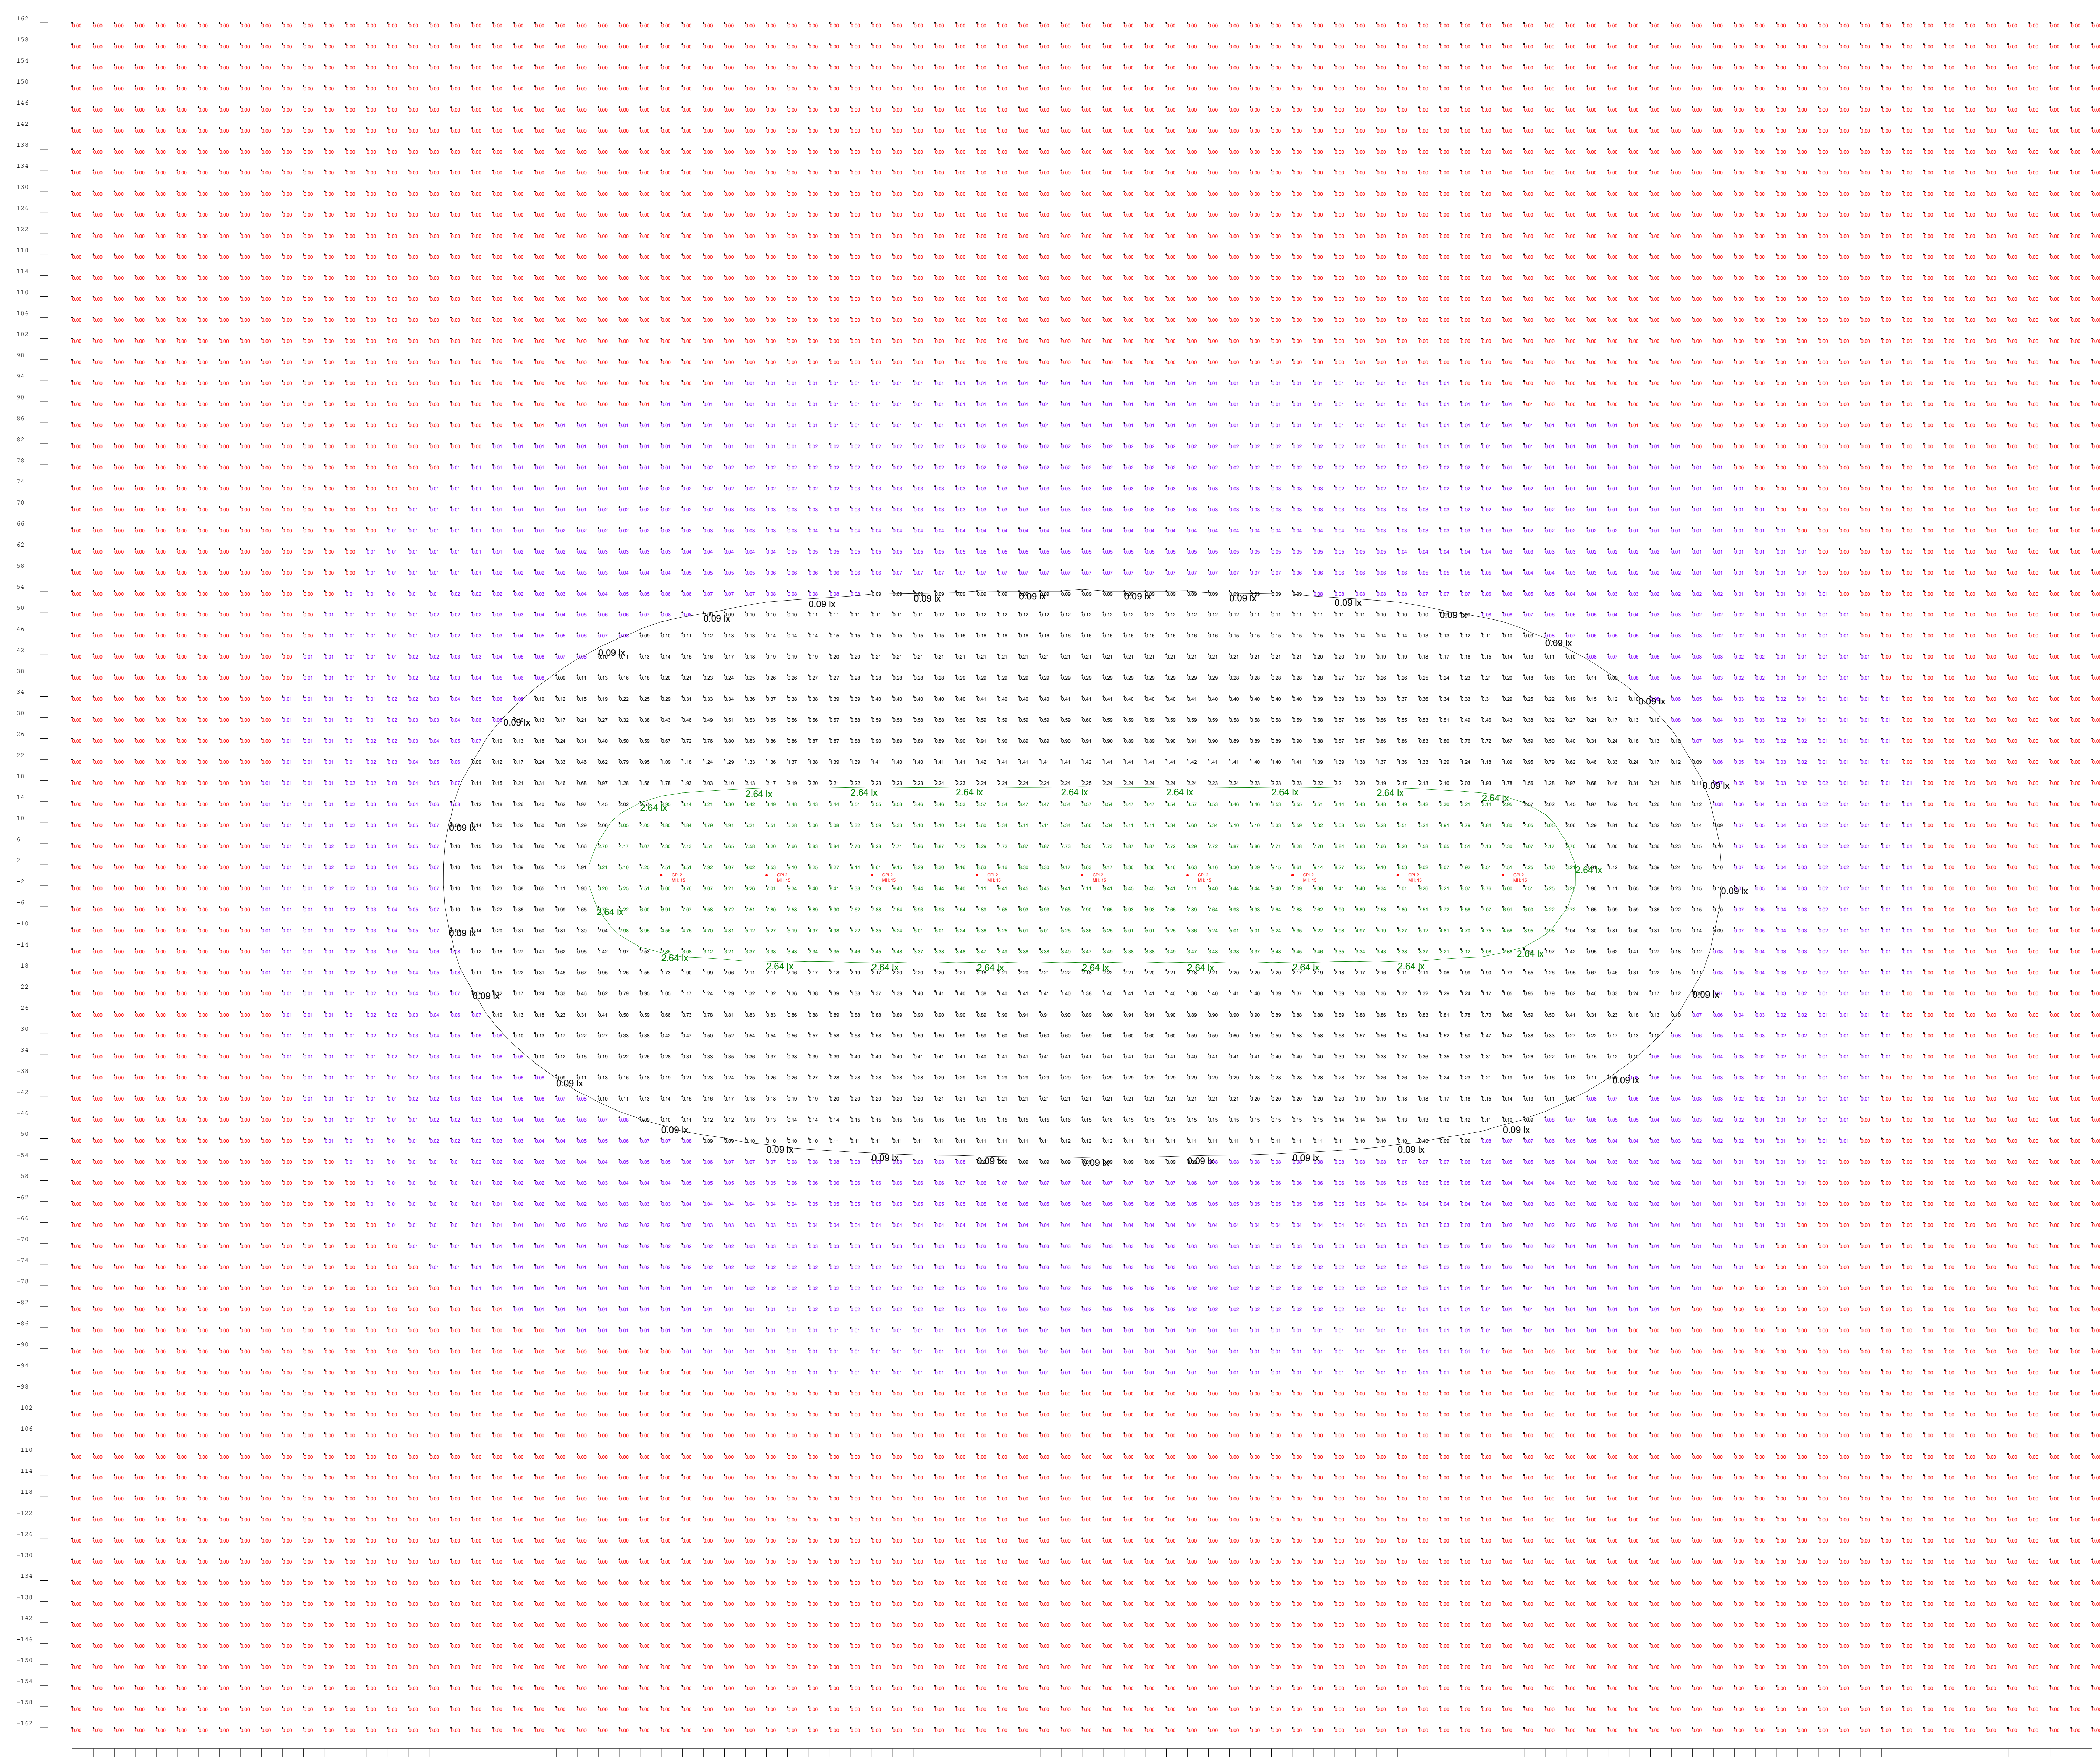

**Green = Values 4:1 Max/Min of Total Calculated Area (Max 9.41) Greater than 2.63L**  
**Black = Values 4:1 Ave/Min of Total Calculated Area (.36 Average) Greater than .08L**  
**Cyan = Values > 0, But < 4:1 Ave/Min of Total Calculated Area**  
**Red = Values = 0**

- Comments:**
- 1) Lux Values Shown are at grade
  - 2) Lux Values shown take into account a 10% reduction in Test data taken at 17V DC
  - 3) Lux Values Grid Spacing is 4 feet

Not to Scale

Luminaire Schedule										
Symbol	Qty	Label	Arrangement	Lum. Lumens	LLF	Description	Lum. Watts	Arr. Watts	Total Watts	
	9	CPL2	SINGLE	529	0.900	CPL2 8w Perimeter	8.194	8.194	73.746	

Calculation Summary								
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min	
CalcPts	Illuminance	Lux	0.36	9.41	0.00	N.A.	N.A.	
4 to 1 Ave-Min_MH15	Illuminance	Lux	1.98	9.41	0.09	22.00	104.56	
4 to 1 Max-Min_MH15	Illuminance	Lux	5.91	9.41	2.53	2.34	3.72	

These drawings are for conceptual use only and are not intended for construction. Values represented are an approximation generated from manufacturers photometric inhouse or independent lab tests with data supplied by lamp manufacturers.