


#	Date	Comments

Revisions	

Drawn By: Joe Frey
Checked By:
Date: 12/16/2020
Scale: None

Test Description:
Perimeter Model CPL2
Tested at 17V DC 20' Foot Spacing,
Lumiere 9.5' Feet Off Grade

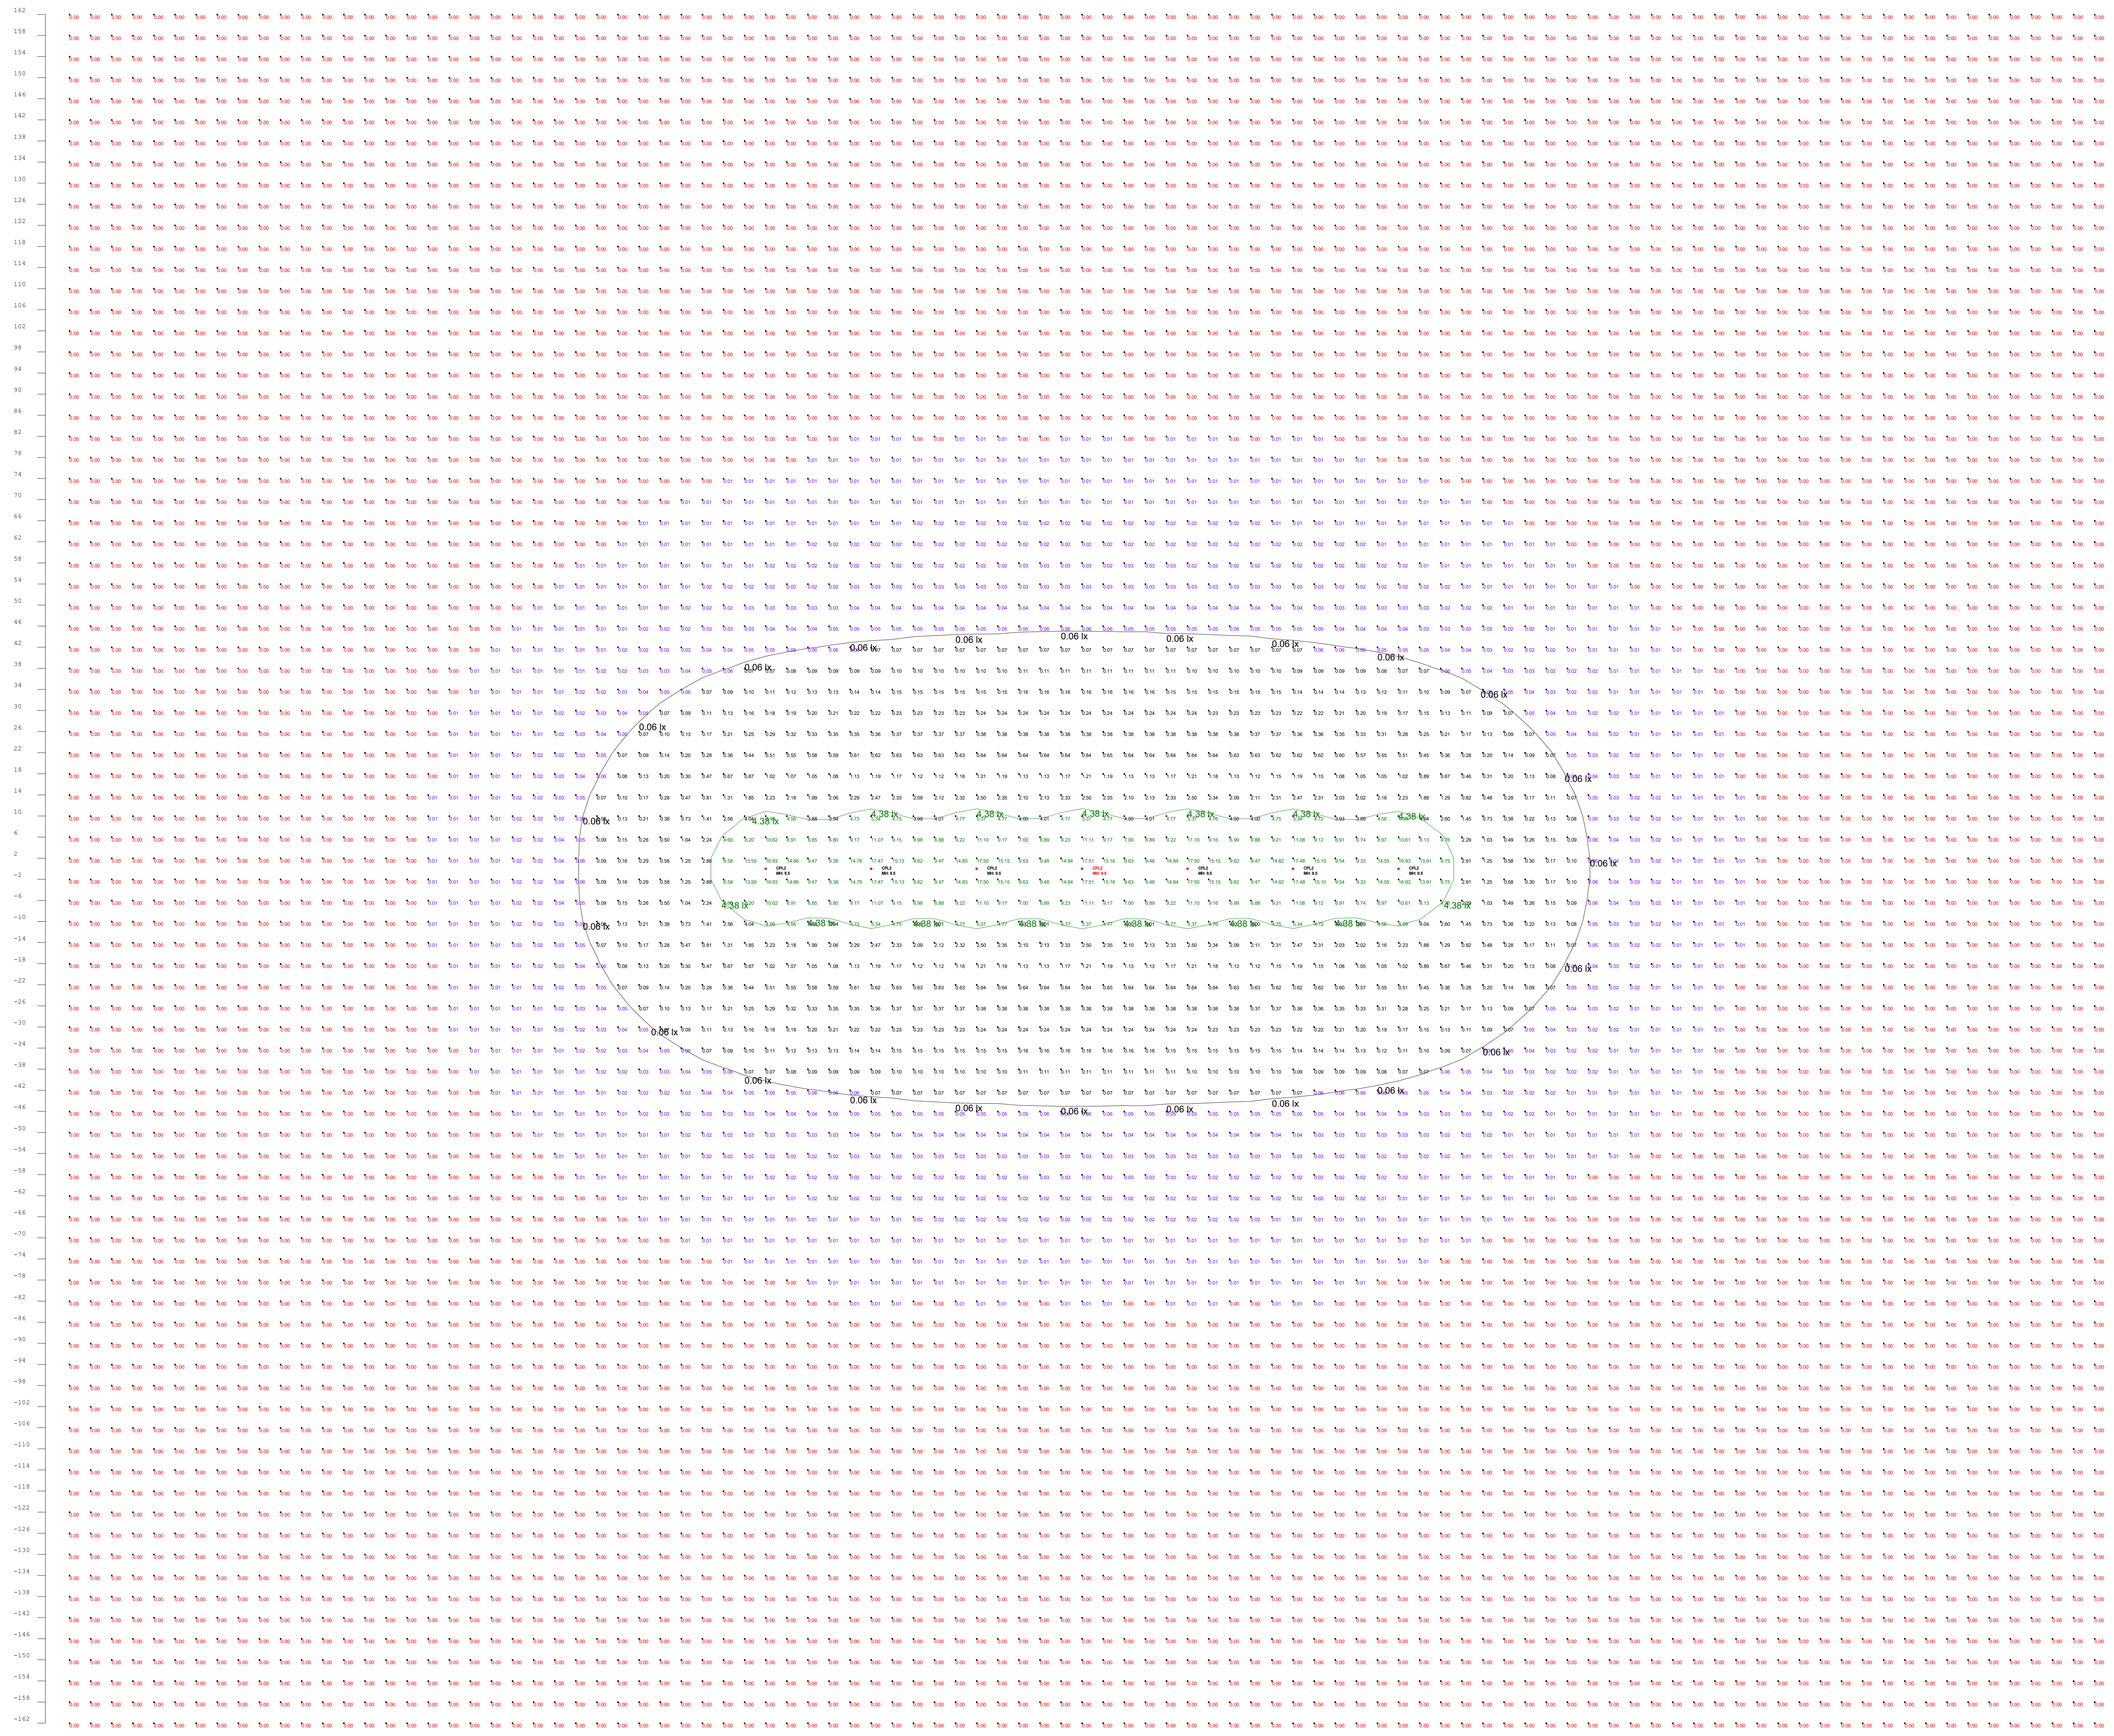

Green = Values 4:1 Max/Min of Total Calculated Area
Black = Values 4:1 Ave/Min of Total Calculated Area

- Comments:**
- 1) Lux Values Shown are at grade
 - 2) Lux Values shown take into account a 10% reduction in Test data taken at 17V DC
 - 3) Lux Values Grid Spacing is 4 feet

Cyan = Values > 0, But < 4:1 Ave/Min of Total Calculated Area
Red = Values = 0

Not to Scale

Luminaire Schedule						
Symbol	Qty	Label	Arrangement	Lum. Lumens	LLF	Description
	7	CPL2	SINGLE	529	0.900	CPL2 8w Perimeter
						Lum. Watts
						Arr. Watts
						Total Watts
						8.194
						8.194
						57.358

Calculation Summary								
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min	
4 to 1 Ave-Min E	Illuminance	Lux	0.28	17.51	0.00	N.A.	N.A.	
4 to 1 Max-Min E	Illuminance	Lux	2.43	17.51	0.07	34.71	250.14	
4 to 1 Max-Min E	Illuminance	Lux	9.48	17.51	4.56	2.08	3.84	

These drawings are for conceptual use only and are not intended for construction. Values represented are an approximation generated from manufacturers photometric inhouse or independent lab tests with data supplied by lamp manufacturers.