


#	Date	Comments

Revisions	

Drawn By: Joe Frey
Checked By:
Date: 12/16/2020
Scale: None

Test Description:
Perimeter Model CPL325
Tested at 17V DC 20' Foot Spacing,
Lumiere 10' Feet Off Grade
CL973-3720

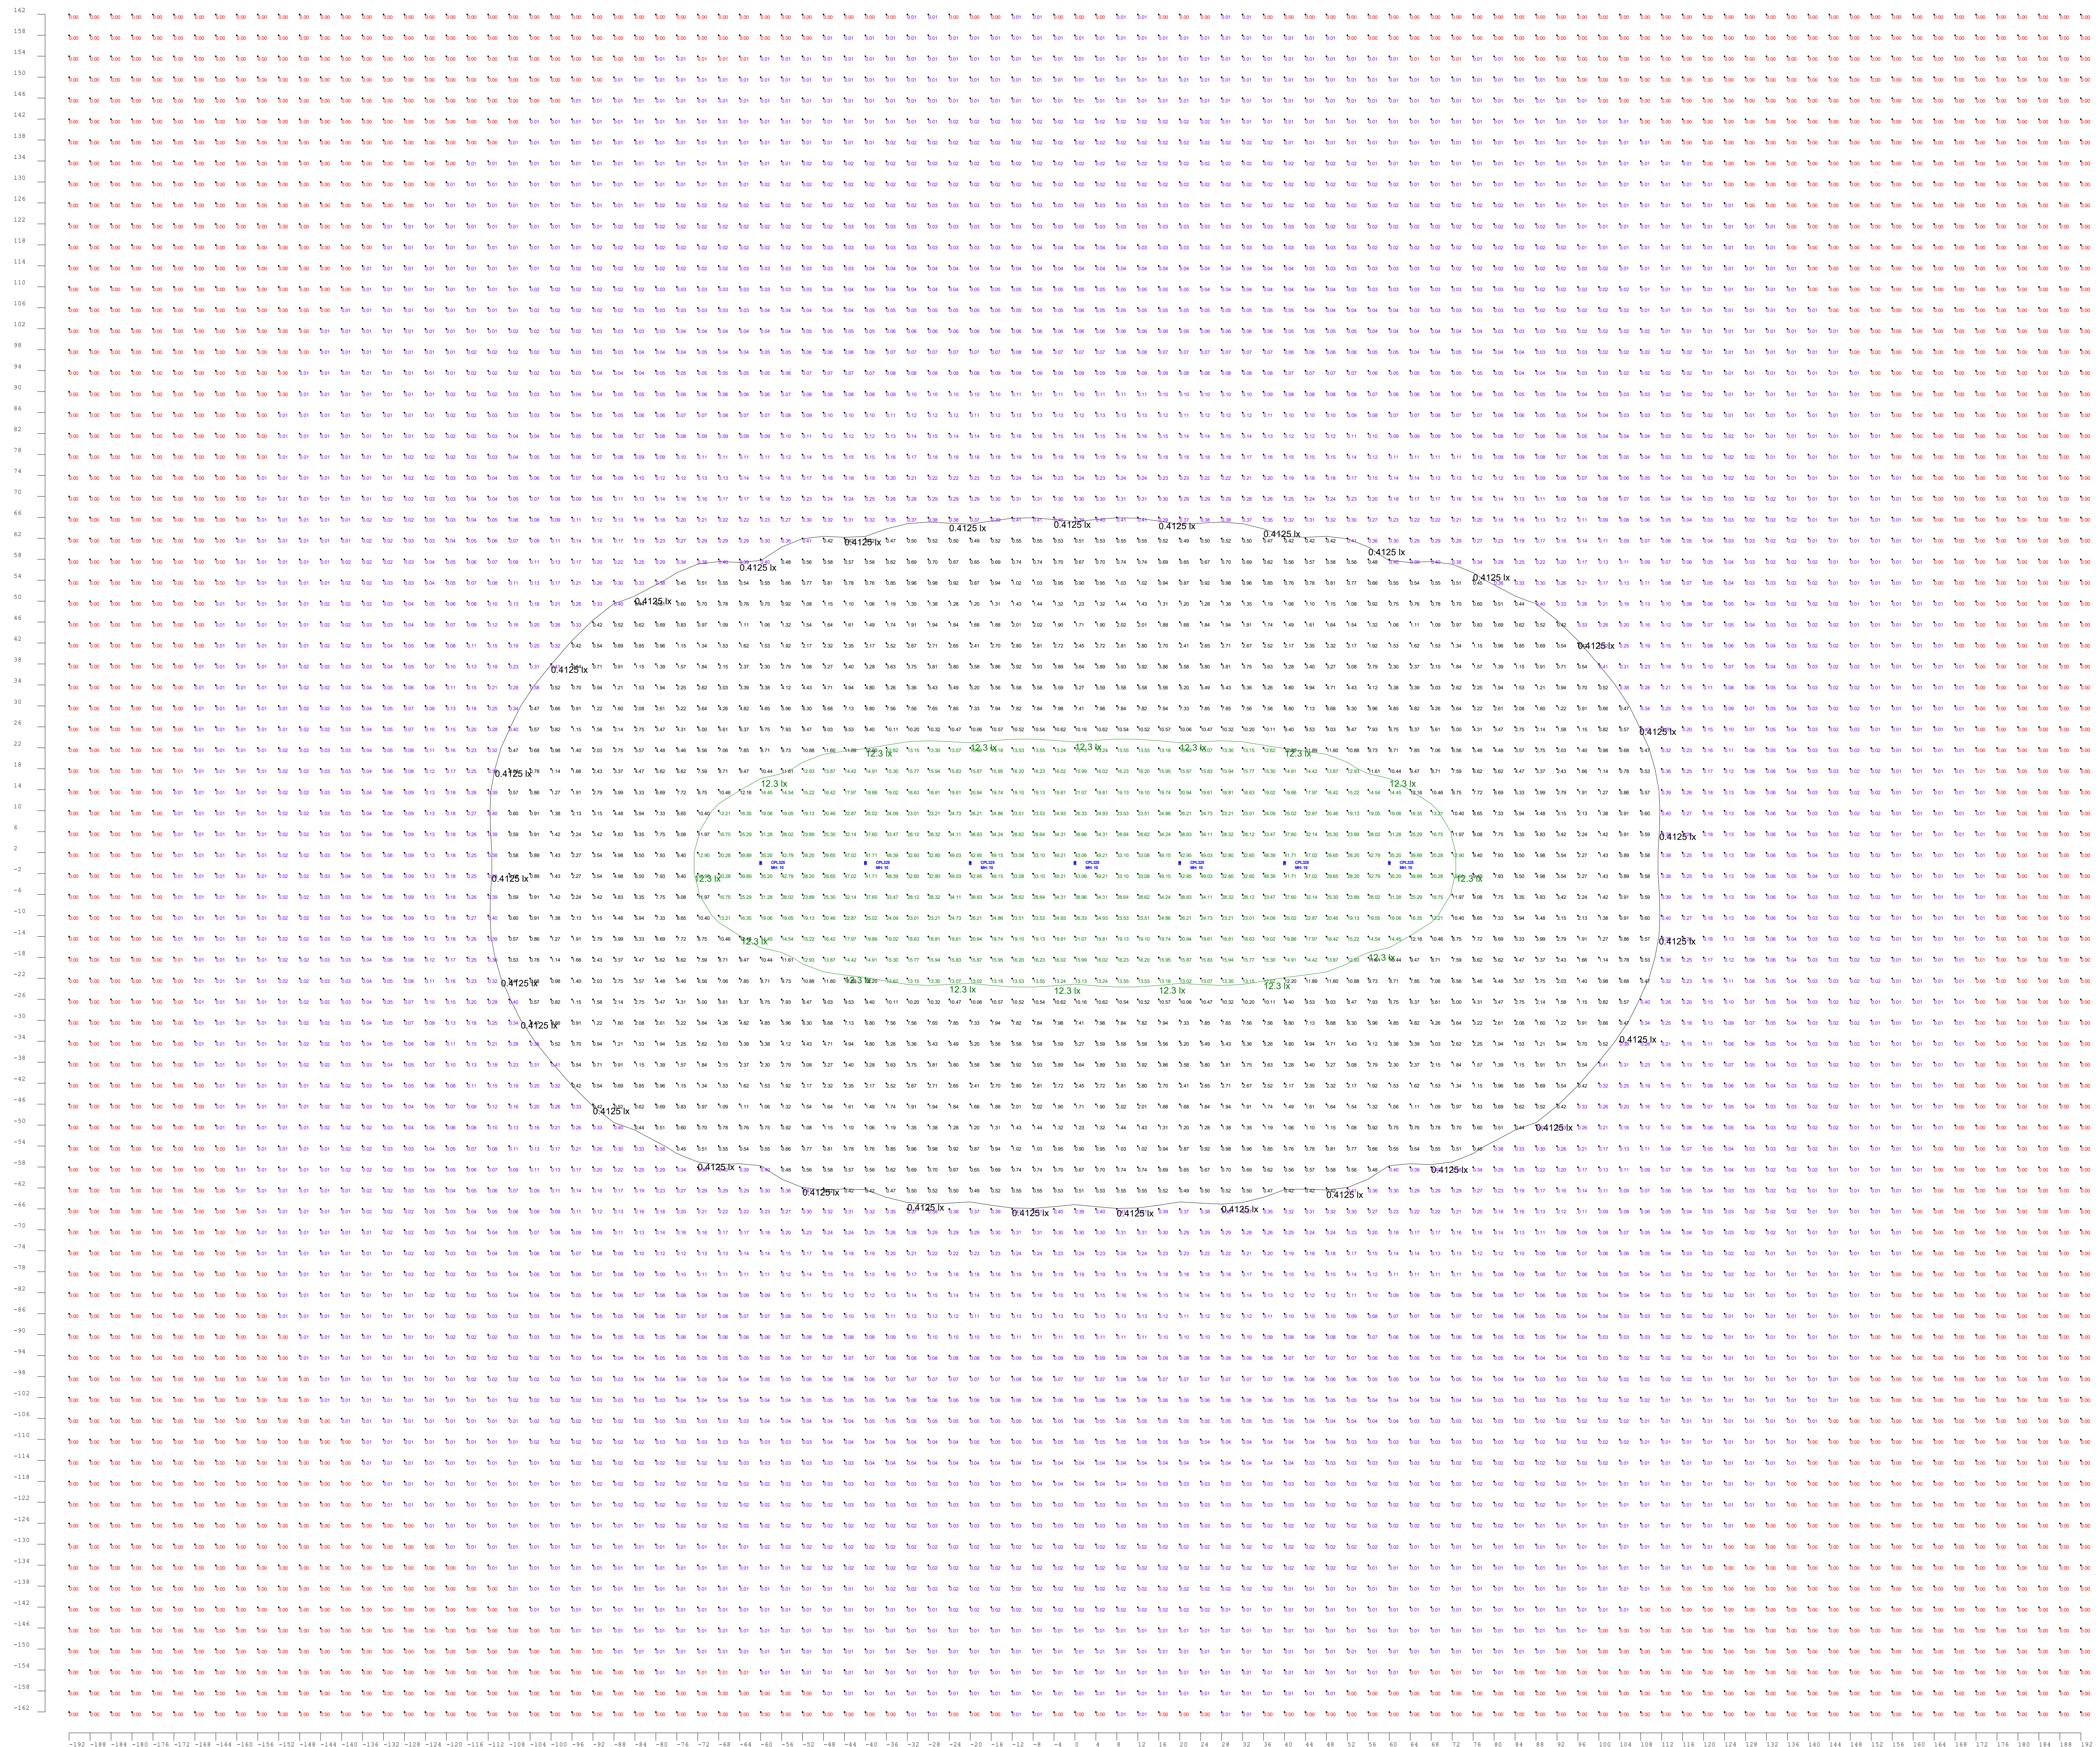

Green = Values 4:1 Max/Min of Total Calculated Area
Black = Values 4:1 Ave/Min of Total Calculated Area

- Comments:**
- 1) Lux Values Shown are at grade
 - 2) Lux Values shown take into account a 10% reduction in Test data taken at 17V DC
 - 3) Lux Values Grid Spacing is 4 feet

Cyan = Values > 0, But < 4:1 Ave/Min of Total Calculated Area
Red = Values = 0

Not to Scale

Symbol	Qty	Label	Arrangement	Lum. Lumens	LLF	Description	Lum. Watts	Arr. Watts	Total Watts
	7	CPL325	SINGLE	3114	0.900	CPL325 Gen 3 - 36w Perimeter	34.23	34.23	239.61

Calculation Summary					
Label	CalcType	Units	Avg	Max	Min
4 to 1 Ave-Min D	Illuminance	Lux	1.65	49.21	0.00
4 to 1 Max-Min D	Illuminance	Lux	8.37	49.21	0.41
4 to 1 Ave-Min D	Illuminance	Lux	24.14	49.21	12.62
4 to 1 Max-Min D	Illuminance	Lux	1.91	49.21	3.90

These drawings are for conceptual use only and are not intended for construction. Values represented are an approximation generated from manufacturers photometric inhouse or independent lab tests with data supplied by lamp manufacturers.