


| # | Date | Comments |
|---|------|----------|
| | | |
| | | |
| | | |

| Revisions | |
|-----------|--|
| | |
| | |
| | |

Drawn By: Joe Frey
Checked By:
Date: 12/16/2020
Scale: None

Test Description:
Perimeter Model CPL325
Tested at 17V DC 30' Foot Spacing,
Lumiere 10' Feet Off Grade

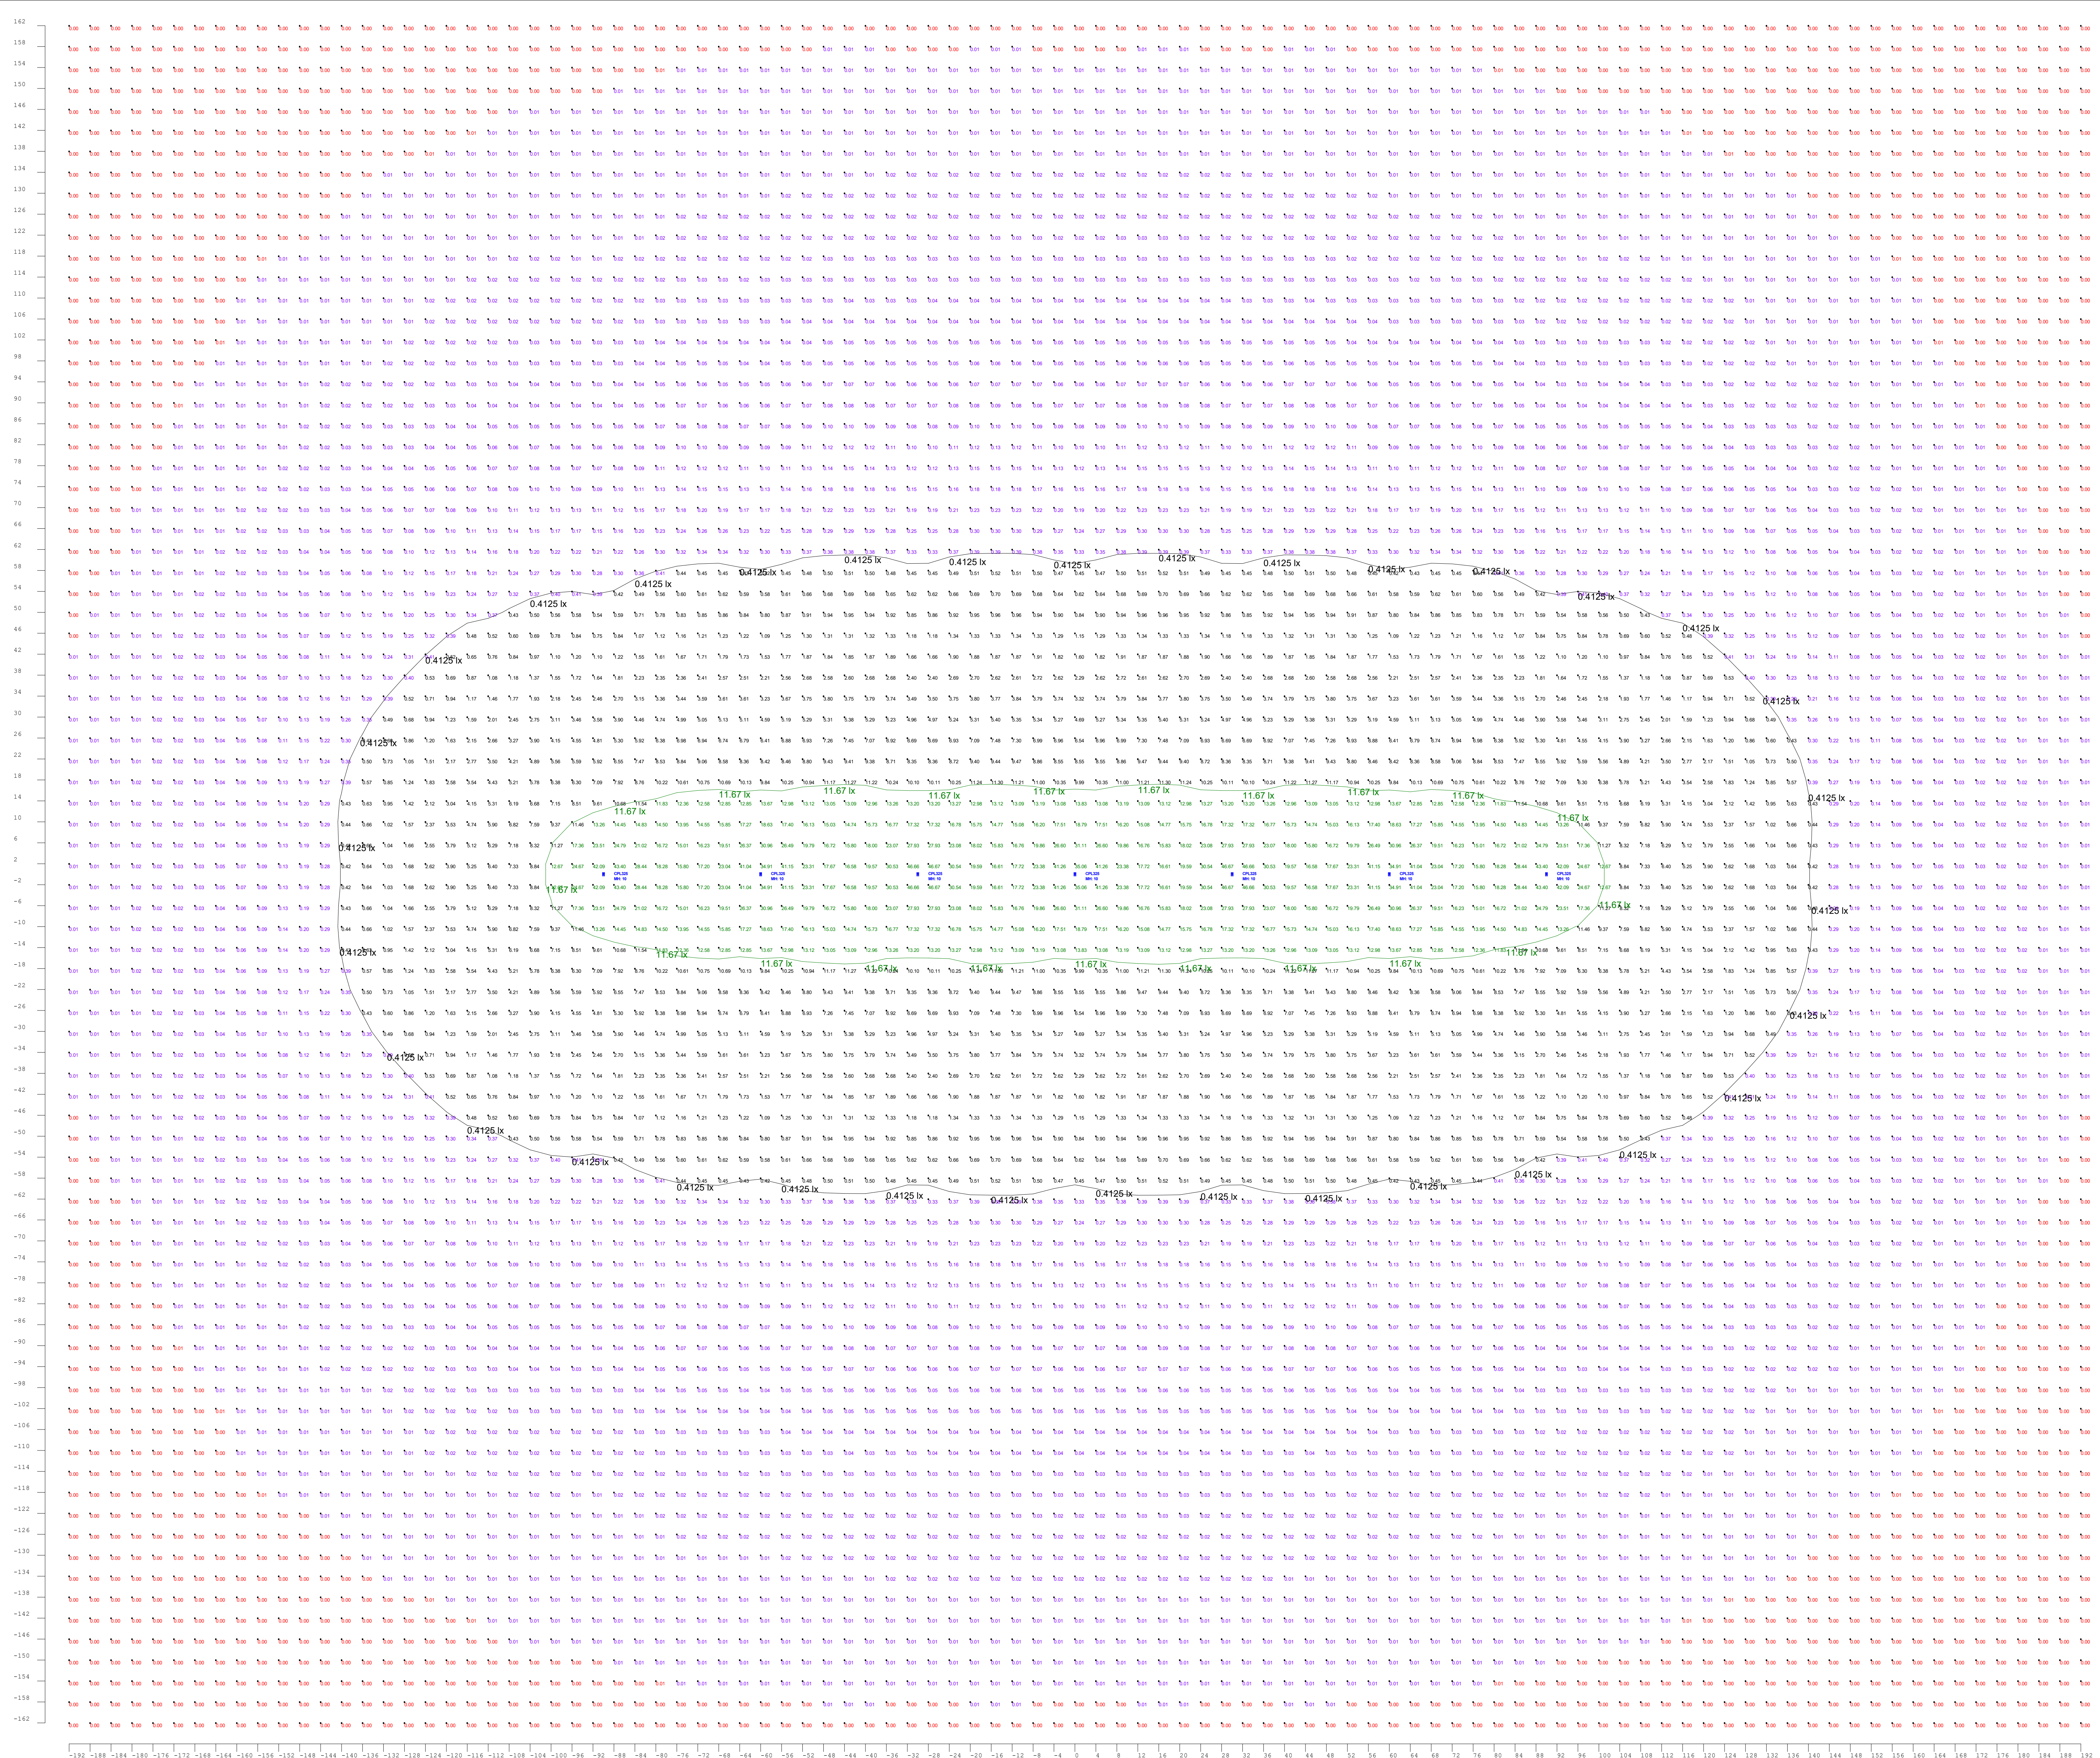

Green = Values 4:1 Max/Min of Total Calculated Area
Black = Values 4:1 Ave/Min of Total Calculated Area
Red = Values = 0

- Comments:**
- 1) Lux Values Shown are at grade
 - 2) Lux Values shown take into account a 10% reduction in Test data taken at 17V DC
 - 3) Lux Values Grid Spacing is 4 feet

Not to Scale

| Symbol | Qty | Label | Arrangement | Lum. Lumens | LLF | Description | Lum. Watts | Arr. Watts | Total Watts |
|--------|-----|--------|-------------|-------------|-------|------------------------------|------------|------------|-------------|
| | 7 | CPL325 | SINGLE | 3114 | 0.900 | CPL325 Gen 3 - 36w Perimeter | 34.23 | 34.23 | 239.61 |

| Calculation Summary | | | | | | |
|---------------------|-------------|-------|-------|-------|-------|---------|
| Label | CalcType | Units | Avg | Max | Min | Avg/Min |
| 4 to 1 Ave-Min J | Illuminance | Lux | 1.65 | 46.67 | 0.00 | N.A. |
| 4 to 1 Ave-Min J | Illuminance | Lux | 6.80 | 46.67 | 0.42 | 16.19 |
| 4 to 1 Max-Min J | Illuminance | Lux | 19.93 | 46.67 | 11.83 | 1.68 |

These drawings are for conceptual use only and are not intended for construction. Values represented are an approximation generated from manufacturers photometric inhouse or independent lab tests with data supplied by lamp manufacturers.