


#	Date	Comments

Revisions	

Drawn By: Joe Frey  
Checked By:  
Date: 2/15/2021  
Scale: None

**Test Description:**  
Perimeter Model CPL325  
Tested at 17V DC 66' Foot Spacing,  
Lumiere 18" Feet Off Grade

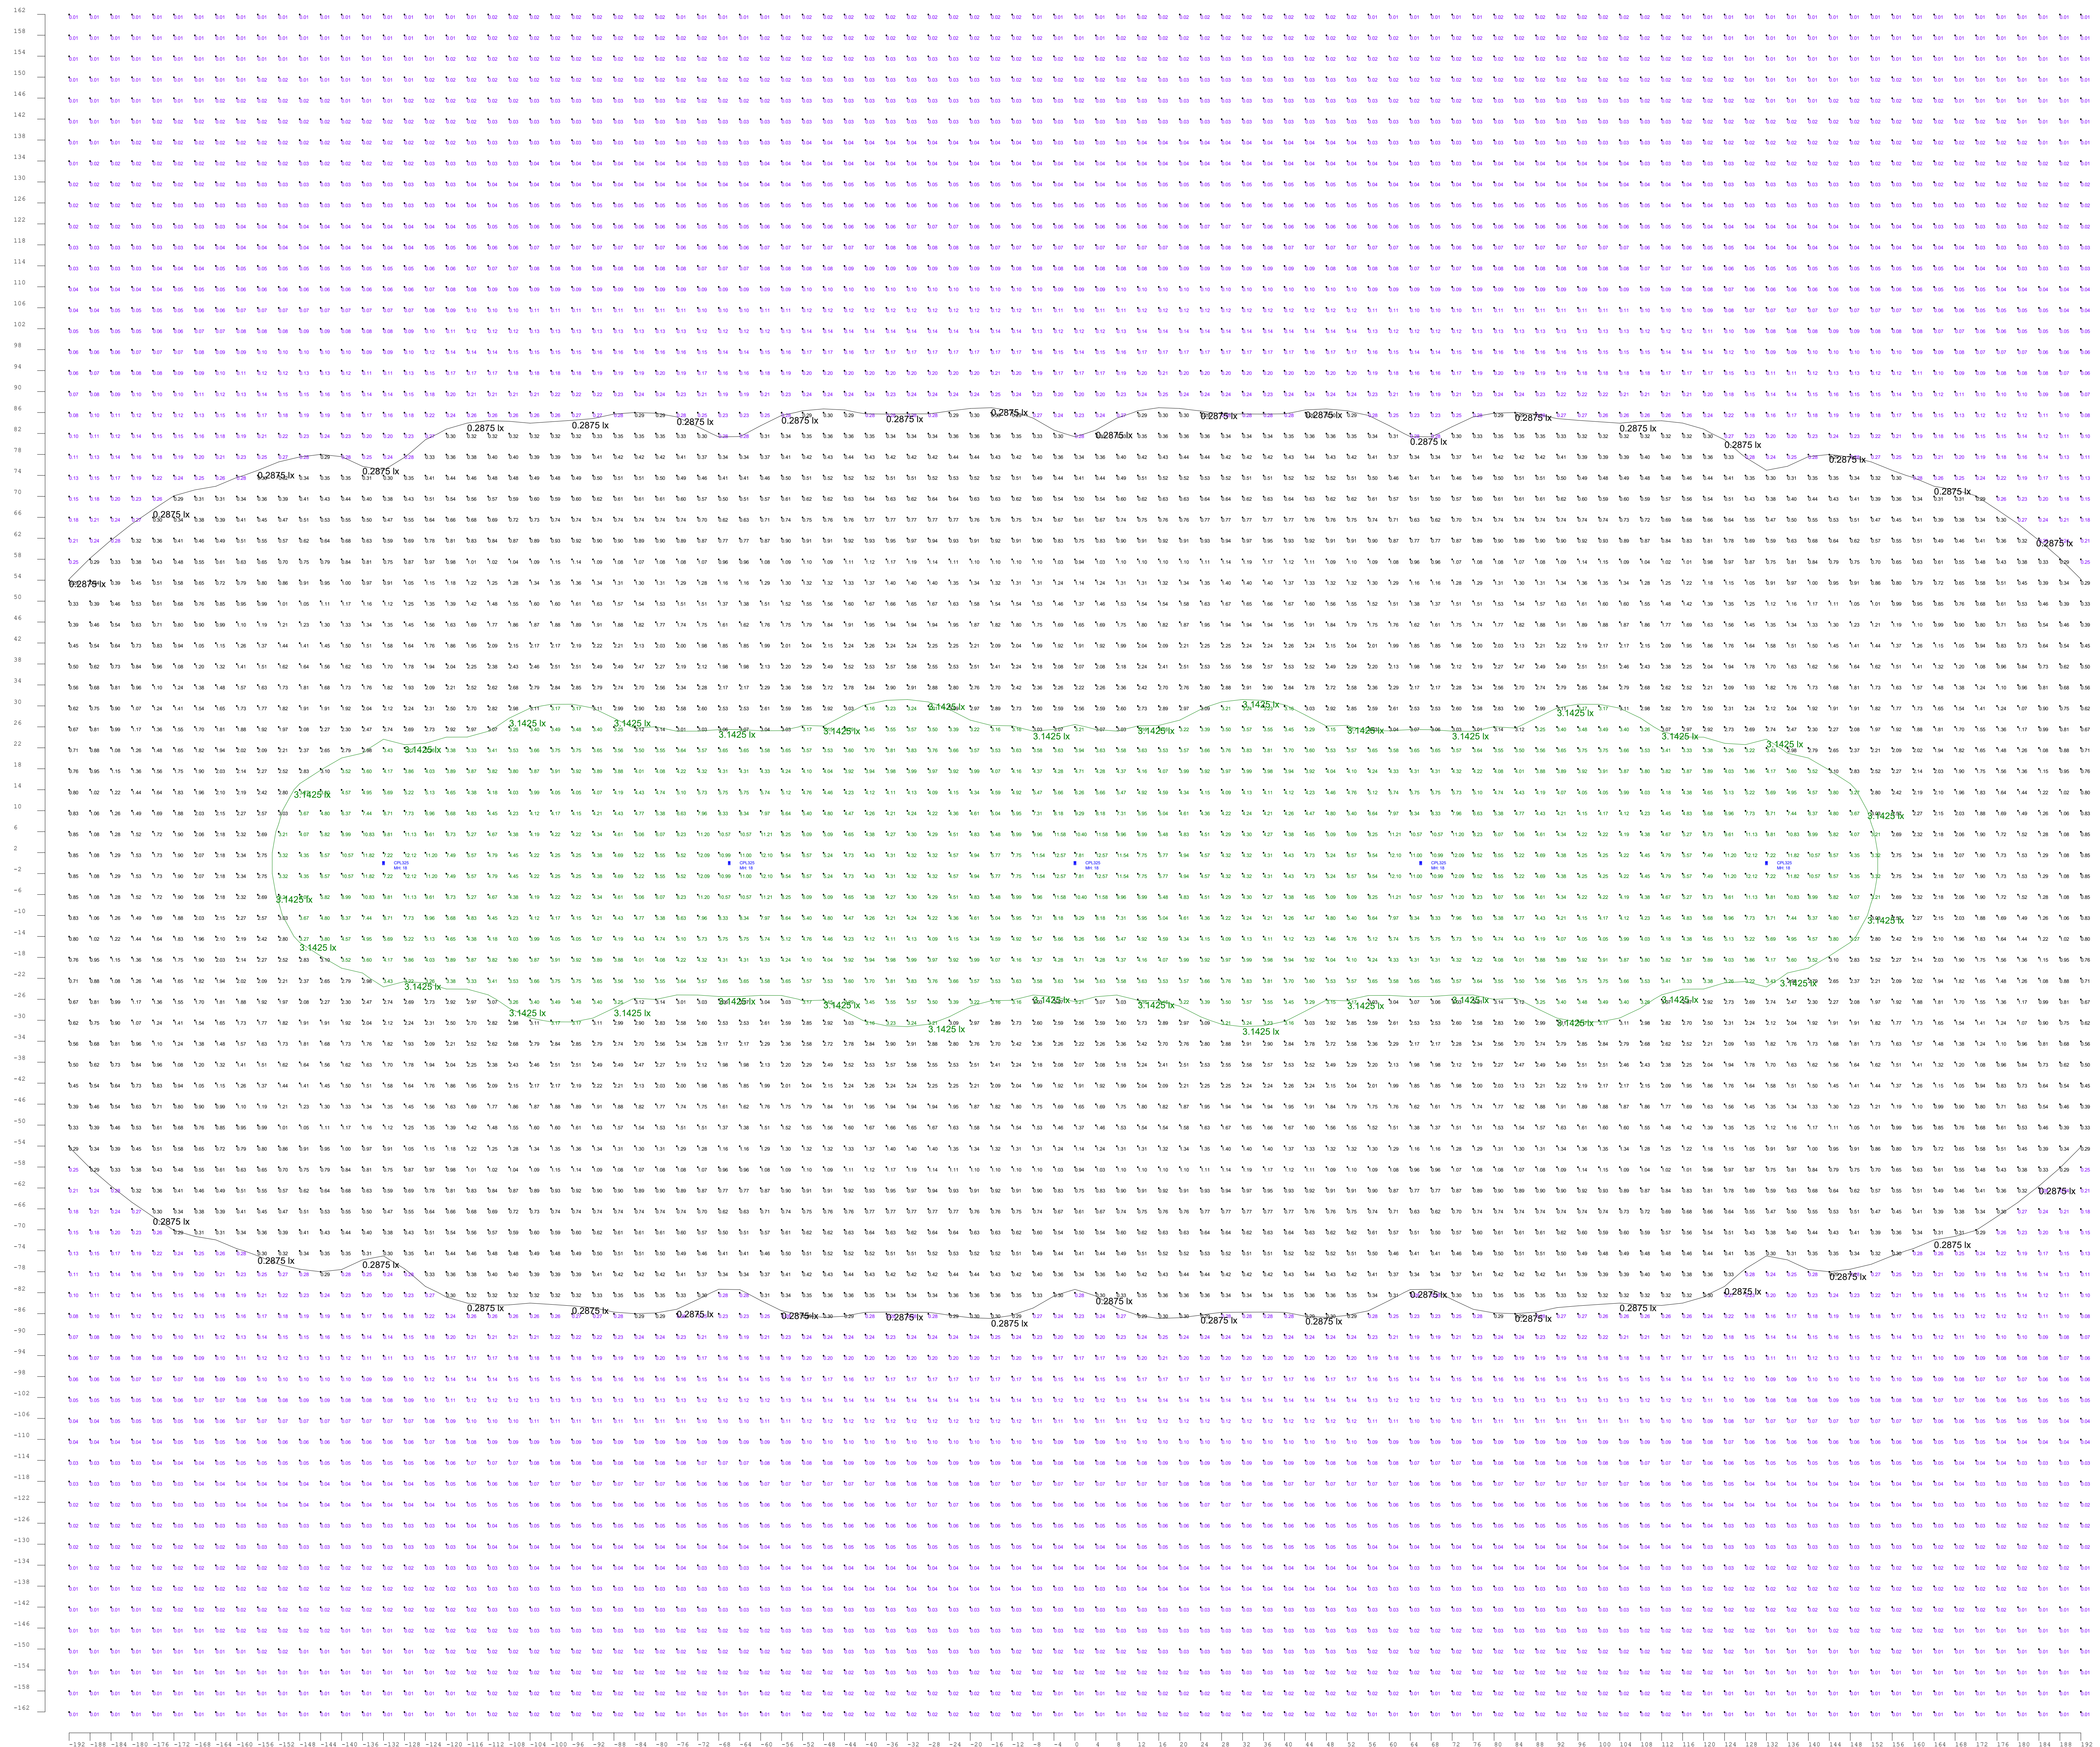

**Green = Values 4:1 Max/Min of Total Calculated Area**  
**Black = Values 4:1 Ave/Min of Total Calculated Area**

**Cyan = Values > 0, But < 4:1 Ave/Min of Total Calculated Area**  
**Red = Values = 0**

- Comments:**
- 1) Lux Values Shown are at grade
  - 2) Lux Values shown take into account a 10% reduction in Test data taken at 17V DC
  - 3) Lux Values Grid Spacing is 4 feet

Not to Scale

Luminaire Schedule										
Symbol	Qty	Label	Arrangement	Lum. Lumens	LLF	Description	Lum. Watts	Arr. Watts	Total Watts	
	5	CPL325	SINGLE	3114	0.900	CPL325 Gen 3 - 36w Perimeter	34.23	34.23	171.15	

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
4 to 1 Ave-Min V	Illuminance	Lux	1.15	12.57	0.01	115.00	1257
4 to 1 Max-Min V	Illuminance	Lux	2.28	12.57	0.29	7.86	43.34
4 to 1 Max-Min V	Illuminance	Lux	5.16	12.57	3.15	1.64	3.99

These drawings are for conceptual use only and are not intended for construction. Values represented are an approximation generated from manufacturers photometric inhouse or independent lab tests with data supplied by lamp manufacturers.