



CAST Wall Wash Light (CWW1CB, CWW1LED2) Product Information

CAST Solid Bronze Wall Wash Light - For Wide Beam Applications



Converts with CSWLED2 Module (sold separately)

Description:

This rugged solid bronze wall wash features a convex borosilicate lens. The CWW1CB can be converted to LED using the CSWLED2 module

The LED Wall Wash (CWW1LED2) features an integrated, replaceable LED module

Features:

- ▶ Solid bronze shroud and body
- ▶ Eurometal stake
- ▶ Pre-wired with 25' tin-coated No-Ox® marine grade wire
- ▶ High-temp socket with solid nickel contacts
- ▶ Spider Splice® ready

Uses:

Suitable for illuminating walls and other broad area applications

Construction:

Solid bronze shroud and body; Eurometal stake; heavy-gauge copper stem; ceramic socket with solid nickel contacts; 25' tin-coated #16-2 No-Ox® marine-grade wire; silicone rubber gasket; borosilicate convex lens.

Dimensions:


Shroud, base and stem: 8" tall x 4.25" wide. Stake: 8.5" tall

Specifications:

CWW1CB Lamp: 12V S8 Wedge Base Krypton (25w max.); lamp included.
CWW1LED2: 2 Cree LED's, L70 Life 60,500 hrs. Color Temp: 2758°K, CRI: 82 Input Voltage: 10 to 24V, AC or DC, Power Factor: .9, Volt Amps: 4.81, Fixture Lumens: 147.6, .4 Amps, 4.33 Watts

Listing:

U.L 1838 Listed Low Voltage Luminaire for wet locations

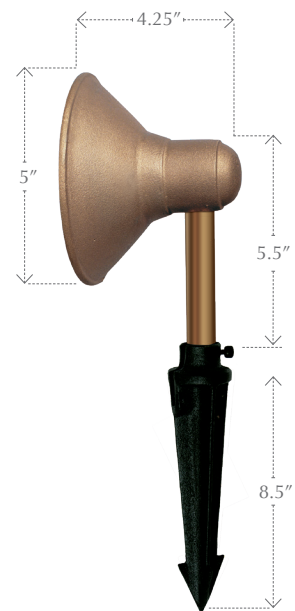

CWW1CB, CWW1LED2